


Technical Datasheet on Shoe washer grid-installation (SWAE-00481)

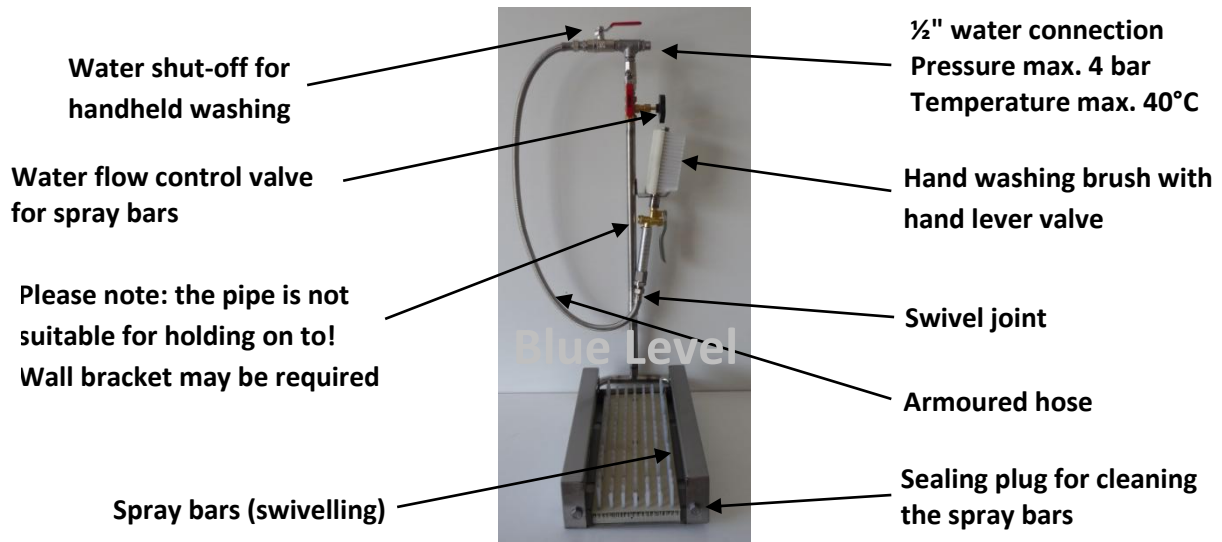

Tighten the piping with suitable pliers (ensure that the ball valves are in the correct position!). The thread is already wrapped with Teflon sealing tape.

- Water inlet must be lockable (on site) and easily accessible (If the washing system is not used for a long period of time, the inlet must be shut off)
- The water connection must comply with the regulations of the responsible waterworks and must be carried out by an authorised specialist company. (Pipe aerator is not included in the scope of delivery)
- The floor around the boot washer must be non-slip.
- Washer material: stainless steel 1.4301, brushes: nylon
- Dimensions: length 500 mm, width 250 mm, height 900 mm
- After installation, check the washer for leaks!
- The washing system must be protected from frost!
- Caution! At temperatures below freezing, there is a risk of the waste water pipe freezing and a risk of slipping around the washing system!