

## Technical datasheet on Boots and Work Shoe Washer




- ¾" water connection
- Water temperature up to max. 40 °C
- Maximum water pressure 8 bar
- Water inflow can be shut off (on site), must be easy to reach (the inflow must be shut off if the washer will not be used for an extended period of time)
- The water connection must comply with the provisions of the relevant waterworks and be performed by an authorised specialist (delivery does not include aerator or system separator)
- Non-slip floor
- 4 adjustable feet to balance out uneven surfaces (the boot washer must be level)
- Comes with sludge collecting tub with/without odour trap (sludge collecting tub must be cleaned when necessary)
- Washer material: stainless steel 1.4301, brushes: nylon
- Outflow of NW 50
- Dimensions: Width 1500 mm, depth 550 mm, height 1,150 mm
- Check the washer for leaks after installation!
- The washer must be protected from freezing
- Please note: at temperatures below freezing point the drain could freeze and there is a risk of slipping on the washer!


Blue Level GmbH  
Säntisstrasse 17  
CH-8280 Kreuzlingen  
Switzerland

eShop: [www.schuhputzmaschine.ch](http://www.schuhputzmaschine.ch)  
eMail: [info@bluelevel.ch](mailto:info@bluelevel.ch)

Stiefel- und Arbeitsschuhe Waschanlage, 2er

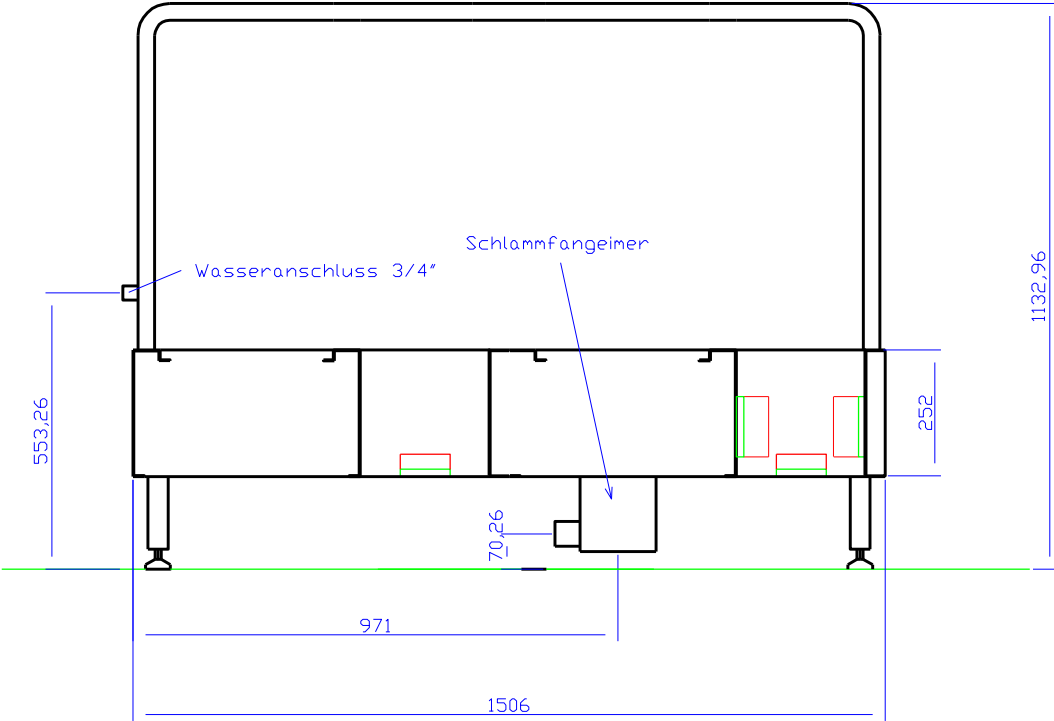

ANSICHT VON VORNE

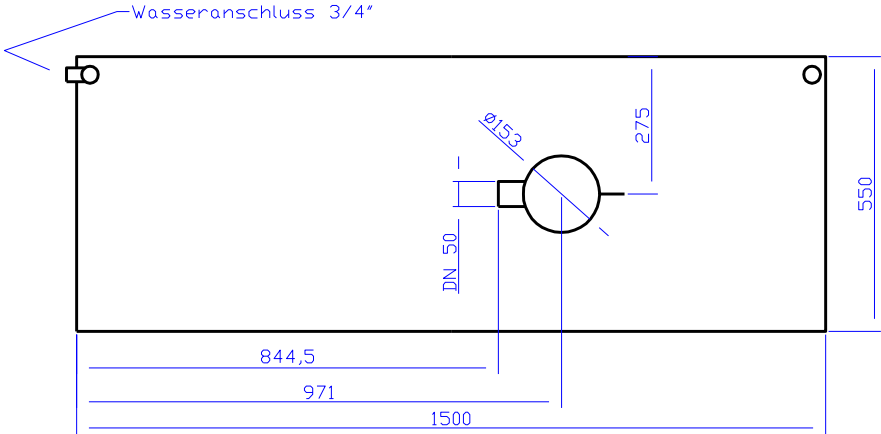

ANSICHT VON OBEN

1		1		1.4301		Blech 2mm
Stück	Benennung	Teil	Norm Nr. Zeichng-Nr	Werkstoff	Rohmaße- Modell Nr.	Bemerkung
Maßstab o.M	Stiefel/Schuhe			Kunde		
Freimaß- toleranzen mittel				03.07.23 Datum	Zeichnung.Nr. 2	